

#### www.suramachine.com

info@suramachine.com


## **Machine Parameter**

Name	Paper Cup Machine
Model	SM SW-100E
Paper Cup Size	2. 5-16 OZ
raw materials	Single and Double Wall PE Coated
Speed	80-100 pc/min
Appropriate paper weight	$150-300 \mathrm{g/m^2}; \pm 20 \mathrm{g/m^2}$
Voltage Supply	380V, 50HZ
cup size	Bottom 35-70mm, Top 45-90mm, Hight 32-135mm
Working Air Supply	None
Power supply	5 kw
net weight	1680kg
Dimension (mm)	U:2115mm;G:1000mm;Y:1700mm
	L:900mm;W:600mm;H:1500mm
Cup Side Sealing	Ultrasonic
Bottom Sealing	Heating
We can customize	the machine and mold according to customer's requirement.
























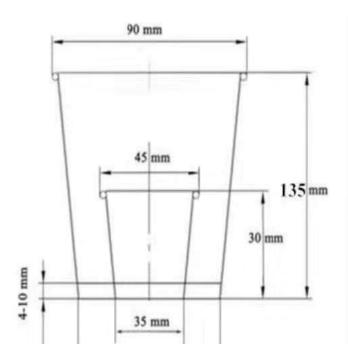

#### Cup Bottom diameter:

Min 35mm ~ Max 70mm

#### **Cup Top Diameter:**

Min 45mm ~ Max 90mm;

#### **Cup Height:**

Min 30mm ~ Max135mm

Bottom Knurling Depth:

Min 4mm ~ Max 10mm (popula

Top Curling Rim Diameter:

Popular about Φ2.5 ~ Φ3

### Paper Cup Sample:














## Adopt Open Cam for splitting movement, compare with index gearbox,

Easy to maintain, sturdy and reliable, easily replace broken parts.

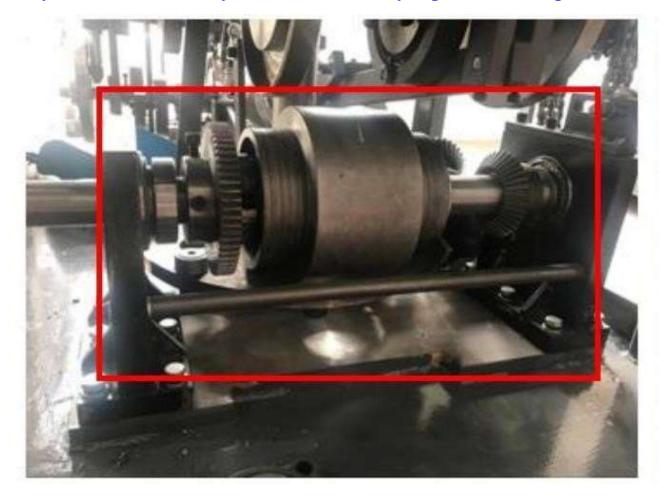

The main mechanism and moving parts are controlled by quality gears, which are more efficient and stronger than the chain and axis.












The Left Cam is for controlling the left closure holder. The Right Cam is for controlling the right shut-off holder.

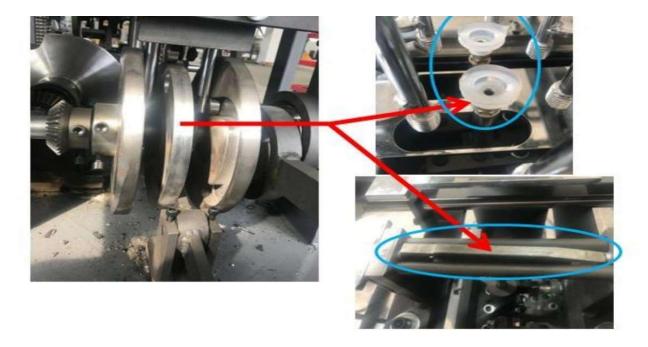

The middle Cam is for controlling Sucker and Rod Hold paper fan End-to-end Single Shaft in-machine to control the whole machine not difficult to operate and broken and easy to check When the machine is running















# **Communication Details**



+90 552 442 33 07 +90 552 632 30 07



info@suramachine.com



www.suramachine.com www.surapack.com Dudullu OSB District, DES Sanayi Sitesi, 101. Sokak No 8/10, 34775 Ümraniye/İstanbul Turkey



Telefon: +90 216 415 66 55

+90 216 420 47 30

+90 850 305 47 30



